


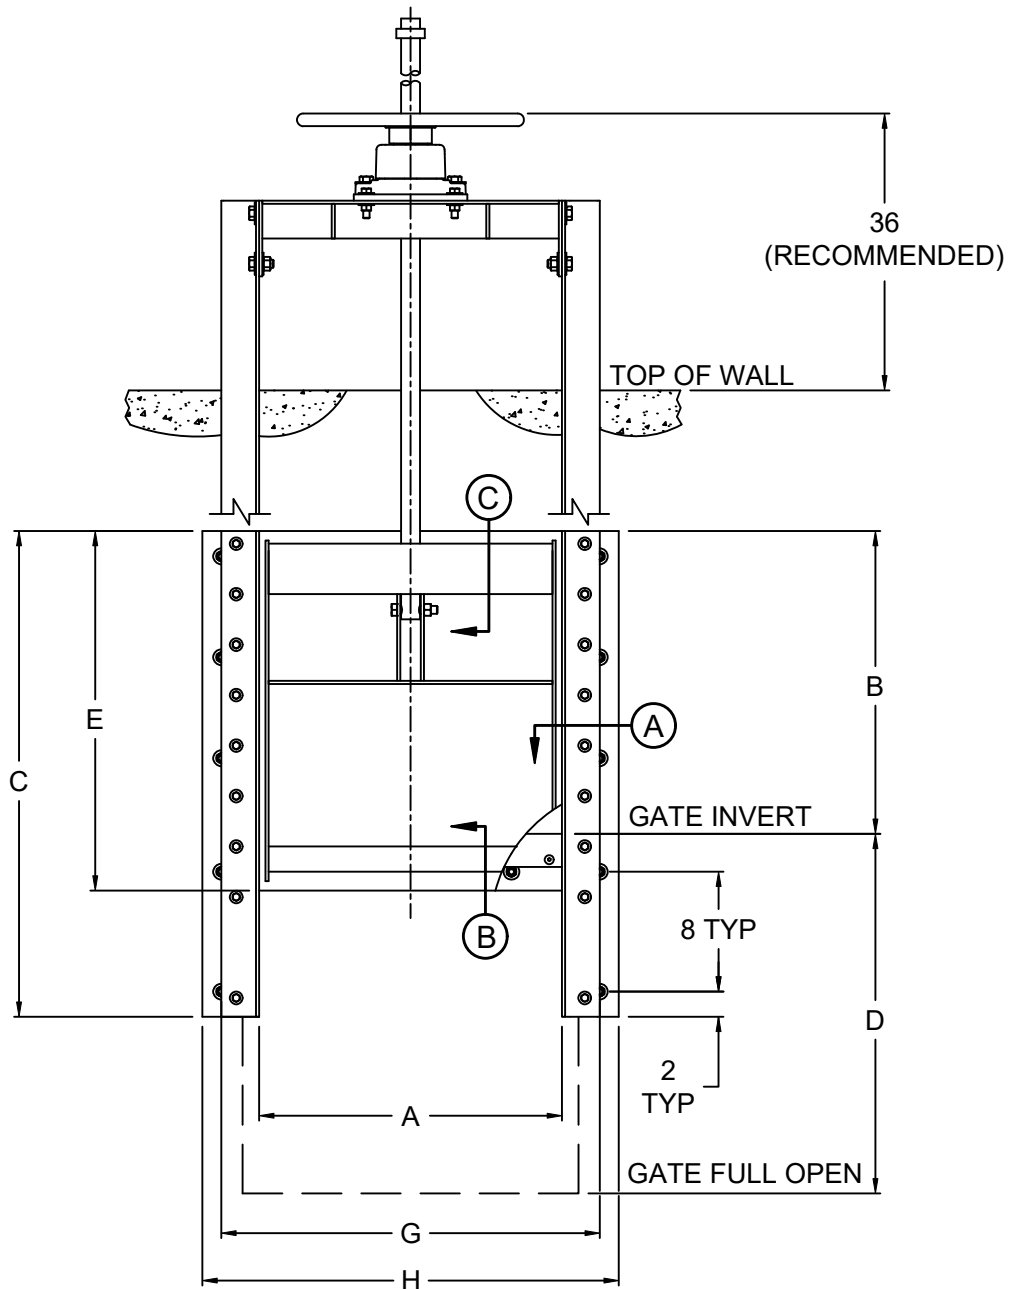

DIMENSIONS - INCHES (")

DESCRIPTION		MIN	MAX	REQ
A	GATE OPENING WIDTH	6.00	72.00	
B	GATE OPENING HEIGHT	6.00	72.00	
C	GUIDE RAIL HEIGHT = $(E/2) + B$	11.25	110.25	
D	GATE FULL OPEN = $B + 4-1/2$	10.50	76.50	
E	SLIDE HEIGHT = $B + 4-1/2$	10.50	76.50	
G	ANCHOR TO ANCHOR = $A + 6$	12.00	78.00	
H	FRAME WIDTH = $A + 9$	15.00	81.00	

DESCRIPTION:

SS-254 Stainless Steel Slide Gate
3-Sided Wall Mount - Downward Opening

DATE:

07/15/2025


DRAWING:

SS-DD0004-A




McWane Plant & Industrial
25500 Road 204
Exeter, CA 93221


Waterman

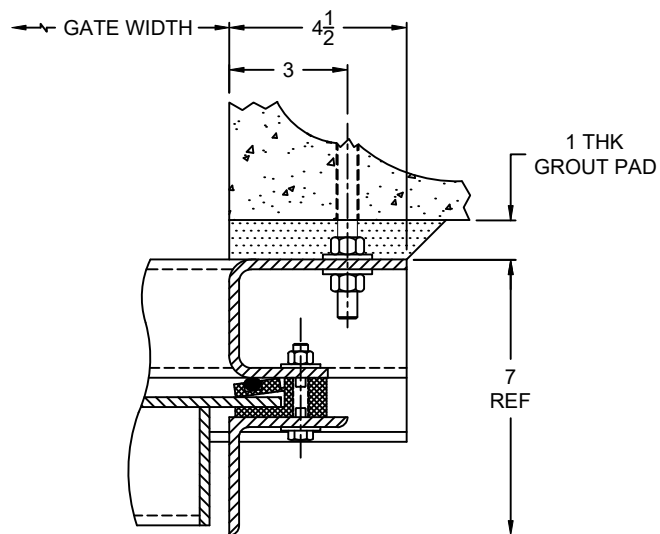

SECTION VIEW - A
FACE MOUNTED GUIDE RAIL

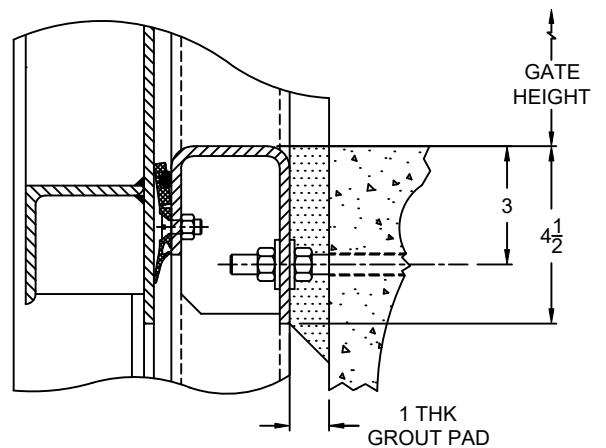

SECTION VIEW - B
CROSS RAIL

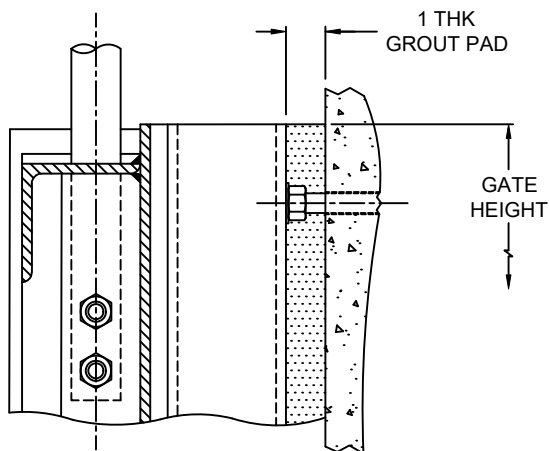

SECTION VIEW - C
TOP OF SLIDE
(RISING STEM)

DESCRIPTION:

SS-254 Stainless Steel Slide Gate
3-Sided Wall Mount - Downward Opening

DATE:

07/15/2025

DRAWING:

SS-DD0004-A

MPI MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
25500 Road 204
Exeter, CA 93221

Waterman