


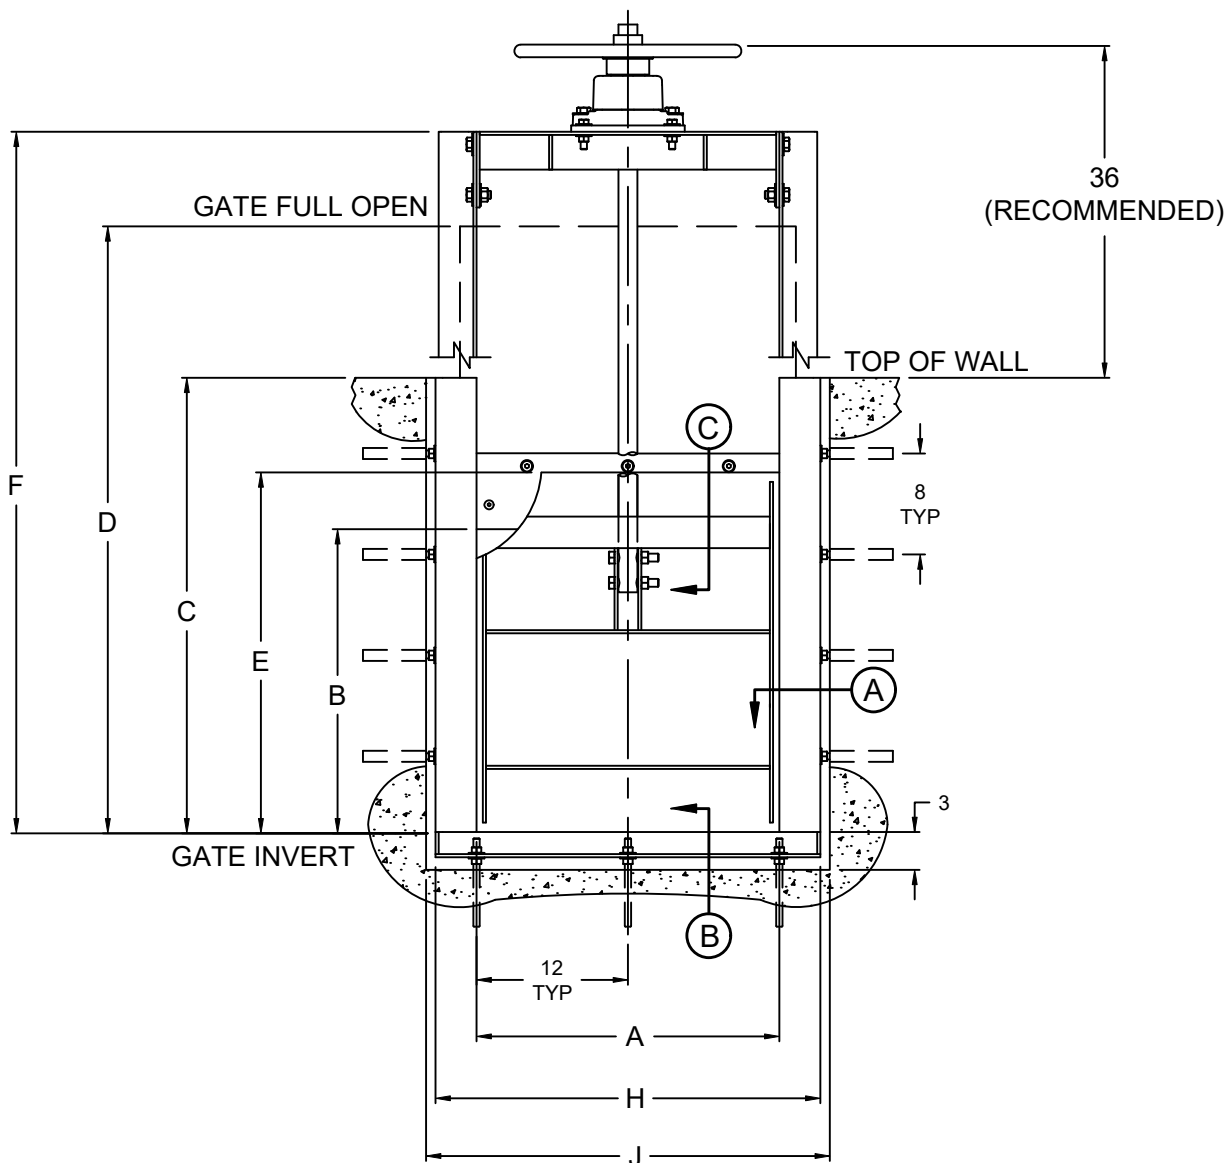

DIMENSIONS - INCHES (")

DESCRIPTION		MIN	MAX	REQ
A	GATE OPENING WIDTH = $J - 8$	6.00	72.00	
B	GATE OPENING HEIGHT	6.00	72.00	
C	GUIDE RAIL HEIGHT = $(E/2) + B$	11.25	110.25	
D	GATE FULL OPEN = $2B + 4-1/2$	16.50	148.50	
E	SLIDE HEIGHT = $B + 4-1/2$	10.50	76.50	
F	SELF-CONTAINED MIN FRAME HEIGHT = $D + 11-1/2$		160.00	
H	FRAME WIDTH = $J - 1-1/2$	12.50	78.50	
J	CHANNEL WIDTH	14.00	80.00	

DESCRIPTION:

SS-259 Stainless Steel Slide Gate
4-Sided Surface Channel - Upward Opening

DATE:

07/15/2025


DRAWING:

SS-DD0009-A




McWane Plant & Industrial
25500 Road 204
Exeter, CA 93221


Waterman

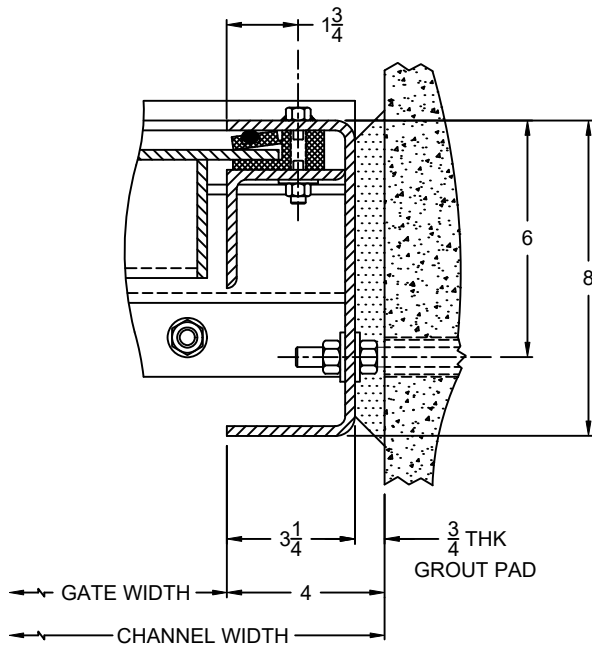


SECTION VIEW - A
SURFACE MOUNTED GUIDE RAIL

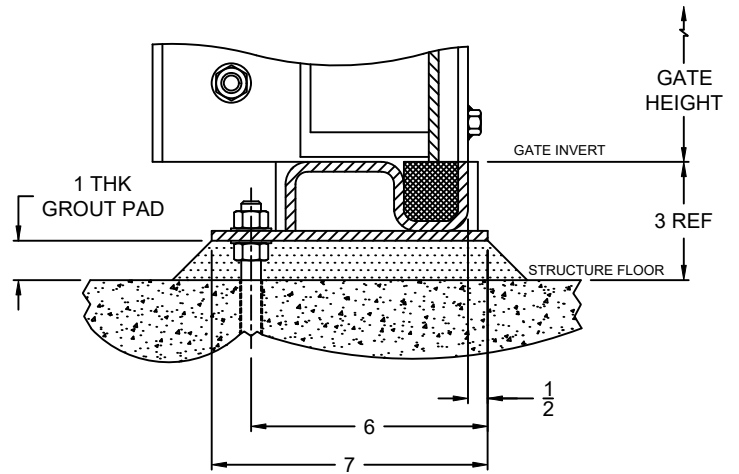

SECTION VIEW - B
EMBEDDED FLUSHBOTTOM RAIL
(STANDARD)

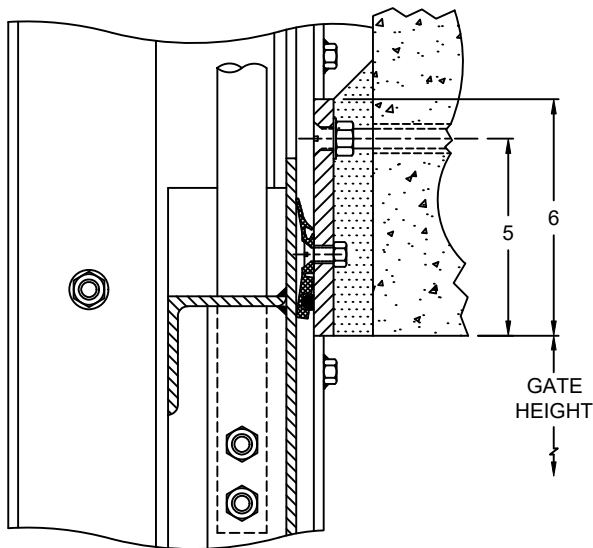

SECTION VIEW - C
CROSS RAIL
(STANDARD RISING STEM)

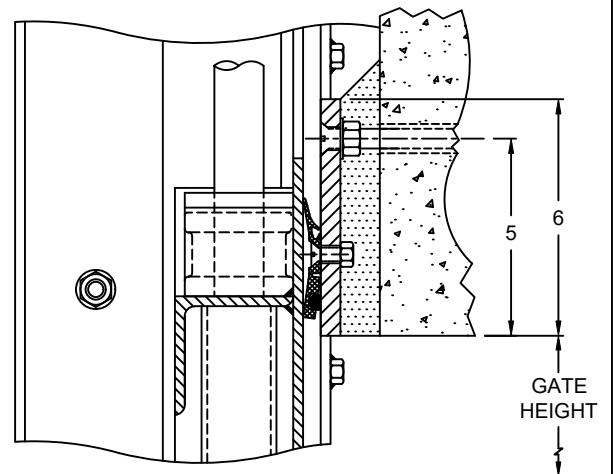

SECTION VIEW - C
CROSS RAIL
(OPTIONAL NON-RISING STEM)

DESCRIPTION:

SS-259 Stainless Steel Slide Gate
4-Sided Surface Channel - Upward Opening

DATE:

07/15/2025

DRAWING:

SS-DD0009-A

MPi MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
25500 Road 204
Exeter, CA 93221

Waterman