

DOUBLE DISC SWING CHECK VALVES



- AWWA C518
- 2"-24"
- NSF/ANSI 61/372 CERTIFIED

MARKETS



WATER/
WASTEWATER



INDUSTRIAL

SPECIFICATIONS

Size Range	2"-24"
Materials	Ductile iron body, CF8M discs, EPDM seat, 316SS springs and pins
Pressure Rating	250psi
Temperature Range	0°F-250°F
Body Style	Wafer
Standards	AWWA C518, NSF/ANSI 61/372 certified
Install Orientation	Horizontal or vertical (flow up)
Featured Applications	Backflow prevention in treatment plants, pump stations, HVAC
Water Service	Potable water, industrial water




ENGINEERING FEATURES

316SS SPRINGS AND HINGE/STOP PINS
For enhanced corrosion resistance.

EPDM SEAT
Vulcanized to body.
Ideal for drinking water applications.

DUCTILE IRON VALVE BODY
Increased strength compared to cast iron bodies.
(Rated 250 psi)

FUSION BONDED EPOXY COATING
NSF-61 approved for drinking water applications.

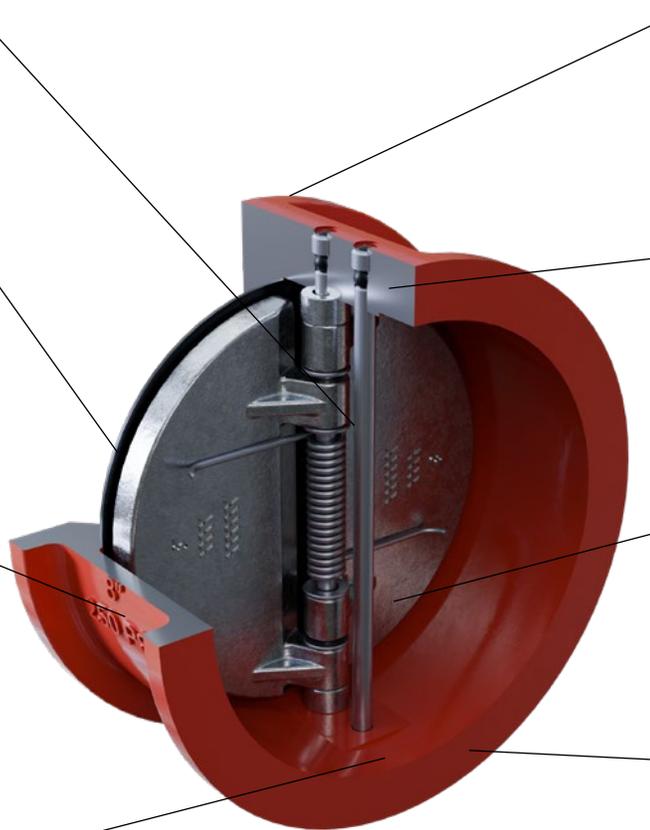

LIFTING EYEBOLT
Standard for sizes 10" and larger.

EPDM STABILIZATION SPHERES
Dampen vibrations to reduce wear.

CF8M 316SS DISCS
High-strength, corrosion-resistant.

ANSI B16.1 CLASS 125 WAFER CONNECTIONS
Fits between two Class 125 flanges.



MPI - MCWANE PLANT & INDUSTRIAL
1201 Vanderbilt Road, Birmingham, AL 35234
866.924.8674 • mcwanepi.com • sales@mcwanepi.com