


HIGH PERFORMANCE BUTTERFLY VALVES



- API 609 CATEGORY B
- NSF 61/372
- API 607 FIRE SAFE
- API 598 SEAT LEAKAGE

MARKETS

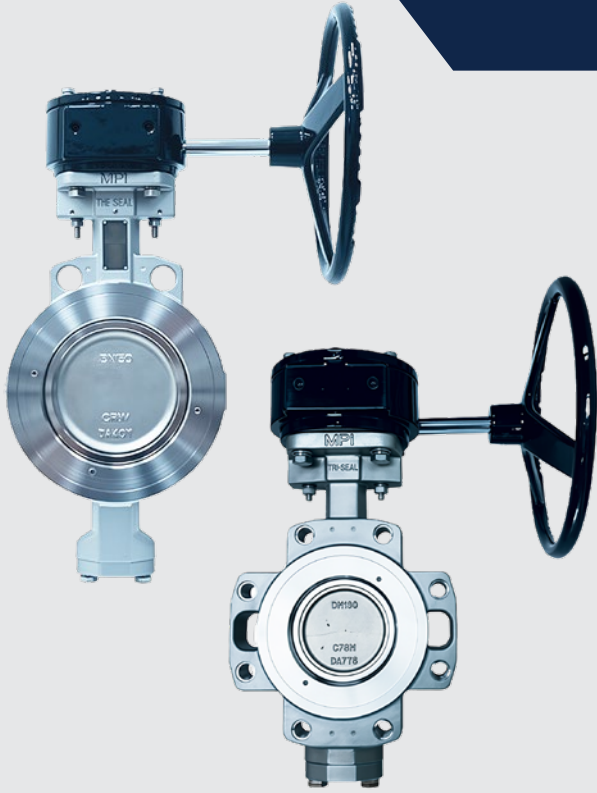

WATER/
WASTEWATER



INDUSTRIAL

SPECIFICATIONS

Size Range	2"-36"
Materials	WCB or CF8M body, CF8M disc, T630SS shaft
Pressure Rating	ASME B16.5 Class 150 (285psi (WCB), 275psi (CF8M))
Temperature Rating	-20°F-400°F
Body Style	Lugged, wafer
Actuator Type	Lever, worm gear, electric motor, pneumatic, hydraulic
Standards	API 609 Category B, NSF 61/372, API 607 Fire Safe, API 598 Seat Leakage
Install Orientation	Horizontal or vertical
Service	On-off/control service



ENGINEERING FEATURES

1. RECESSED GLAND: Our recessed gland packing eliminates the requirement for mounting kit and reduces overall package height. A rocker design gland flange and packing gland are utilized to ensure even compression of the packing.

2. EXTENDED NECK: Bonnet to flange clearance is a minimum of 2" allowing for piping insulation on all sizes of valves.

3. BODY: High quality one-piece casting provides consistent uniformity. Body is available in Wafer or Lug style. Body materials include carbon steel (WCB) and stainless steel (CF8M).

4. INTEGRALLY CAST DISC POSITION STOP: Machined position stop in the body locates the disc in the seat to achieve maximum sealing and seat life.

5. SEAT RETAINER PLATE: Constructed of the same material as the body, our seat retainer plate assures proper sealing and allows for full rated bi-directional dead end service.

6. SHAFT: Our 17-4PH Stainless Steel shaft provides maximum strength and stability for high pressure applications.

7. BONNET: Allows for direct mounting of all types of actuation. Standard drilling conforms to ISO 5211.

8. PACKING: Multi-layered, V-type PTFE packing allows for even compression against shaft and body, providing a positive seal even under high pressure / high cycle applications.

9. BLOWOUT PROOF STEM: Our shaft retention system is designed per API 609 standards.


10. SEATS: High Performance Butterfly Valves feature an innovative free-floating, pressure-assisted, solid seat design that ensures a positive seal under both low and high pressure requirements. Unlike traditional valves, our seat does not rely on secondary components like O-rings or springs, resulting in a longer service life with minimal maintenance

The optional fire-safe seat ensures reliable sealing and safety in tough conditions, with a durable backup ring that seals post-fire, meeting API 607 standards. It offers low torque, great flow control, and resists corrosion and heat, making it ideal for multiple applications.


11. DISC TAPER PINS: Pins are offset from the center of the stem which places them in compression and gives them a yield point greater than the stem itself.

12. DISC: Standard construction is 316 stainless steel. Designed to have minimum deflection and movement under pressure, which reduces torque and improves cycle life. Double offset discs produce a camming motion, allowing it to release from the seat within the first few degrees of opening and reducing wear.

13. BEARINGS: Woven fabric steel backed bearings provide excellent load-bearing capabilities, are self lubricating to provide improved wear life, and are tolerant to harsh high pressure applications.

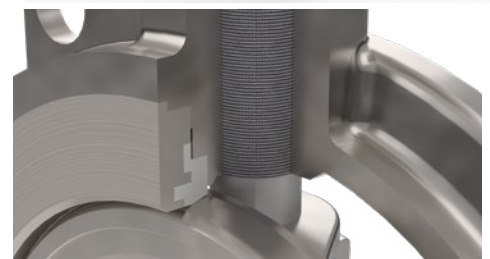

Standard Seat

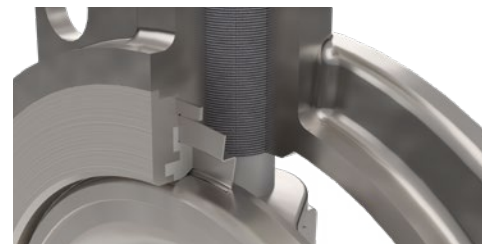

Optional Fire-Safe Seat

This document is provided for general informational purposes only and is not intended to define or represent the scope of supply, configuration, or origin of any product. Images, drawings, diagrams, photographs, and specifications may depict optional features or representative designs and are subject to change without notice. Nothing contained herein shall be deemed to create or extend any warranty, express or implied. All products are sold subject exclusively to McWane Plant & Industrial's standard Terms and Conditions of Sale.



MPI - MCWANE PLANT & INDUSTRIAL
1201 Vanderbilt Road, Birmingham, AL 35234
866.924.8674 • mcwanepi.com • sales@mcwanepi.com