

KEN-FLEX RESILIENT HINGE CHECK VALVES



- AWWA C508
- 3"-36"
- NSF/ANSI 61/372 CERTIFIED

MARKETS




SPECIFICATIONS

Size Range	3"-36"
Materials	Ductile iron body, EPDM or NBR flapper, 316SS hardware, EPDM or NBR O-rings
Pressure Rating	250psi
Temperature Range	0°F-250°F
Body Style	FLG
Standards	AWWA C508, NSF/ANSI 61/372 certified
Install Orientation	Horizontal or vertical (flow up)
Featured Applications	Backflow prevention in treatment plants, pump stations, lift stations, irrigation
Water Service	Potable water, raw water, industrial wastewater, industrial water, primary effluent, secondary effluent, raw sewage, screened sewage, slurries/grit
Optional Accessories	Position indicator, backflow actuator



FEATURES AND BENEFITS

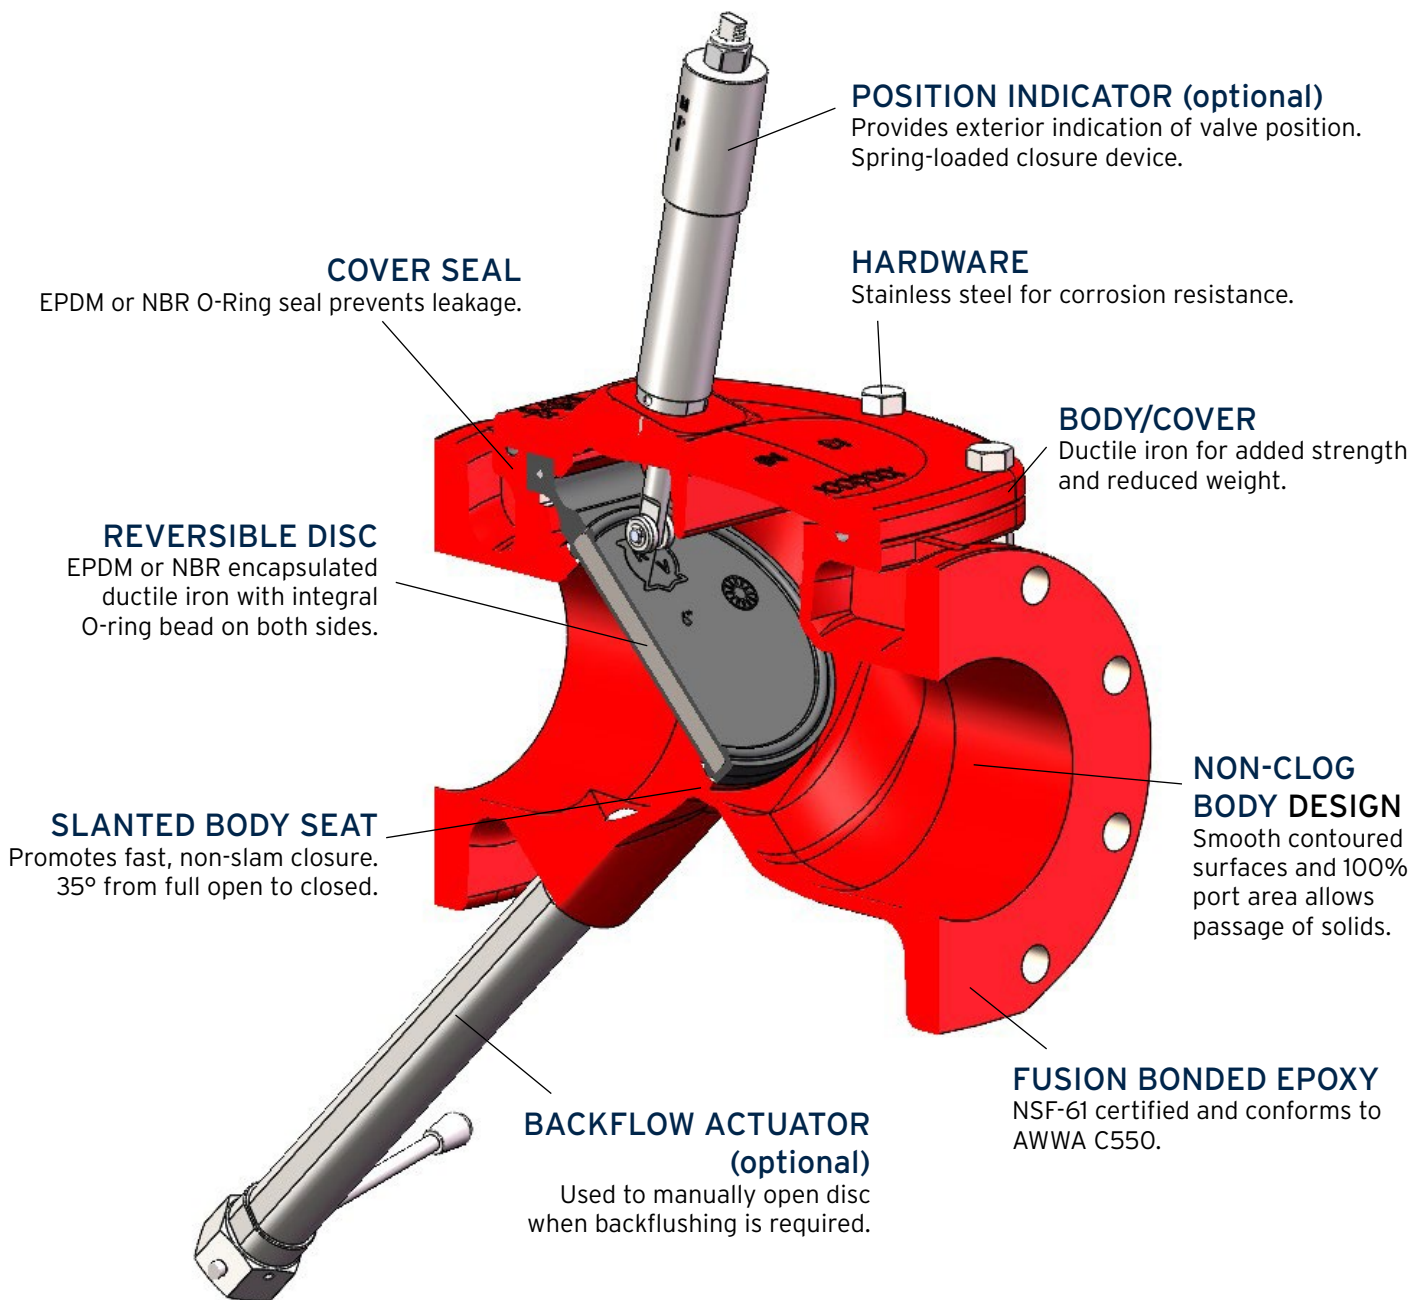

This document is provided for general informational purposes only and is not intended to define or represent the scope of supply, configuration, or origin of any product. Images, drawings, diagrams, photographs, and specifications may depict optional features or representative designs and are subject to change without notice. Nothing contained herein shall be deemed to create or extend any warranty, express or implied. All products are sold subject exclusively to McWane Plant & Industrial's standard Terms and Conditions of Sale.



MPI - MCWANE PLANT & INDUSTRIAL
1201 Vanderbilt Road, Birmingham, AL 35234
866.924.8674 • mcwanepi.com • sales@mcwanepi.com