


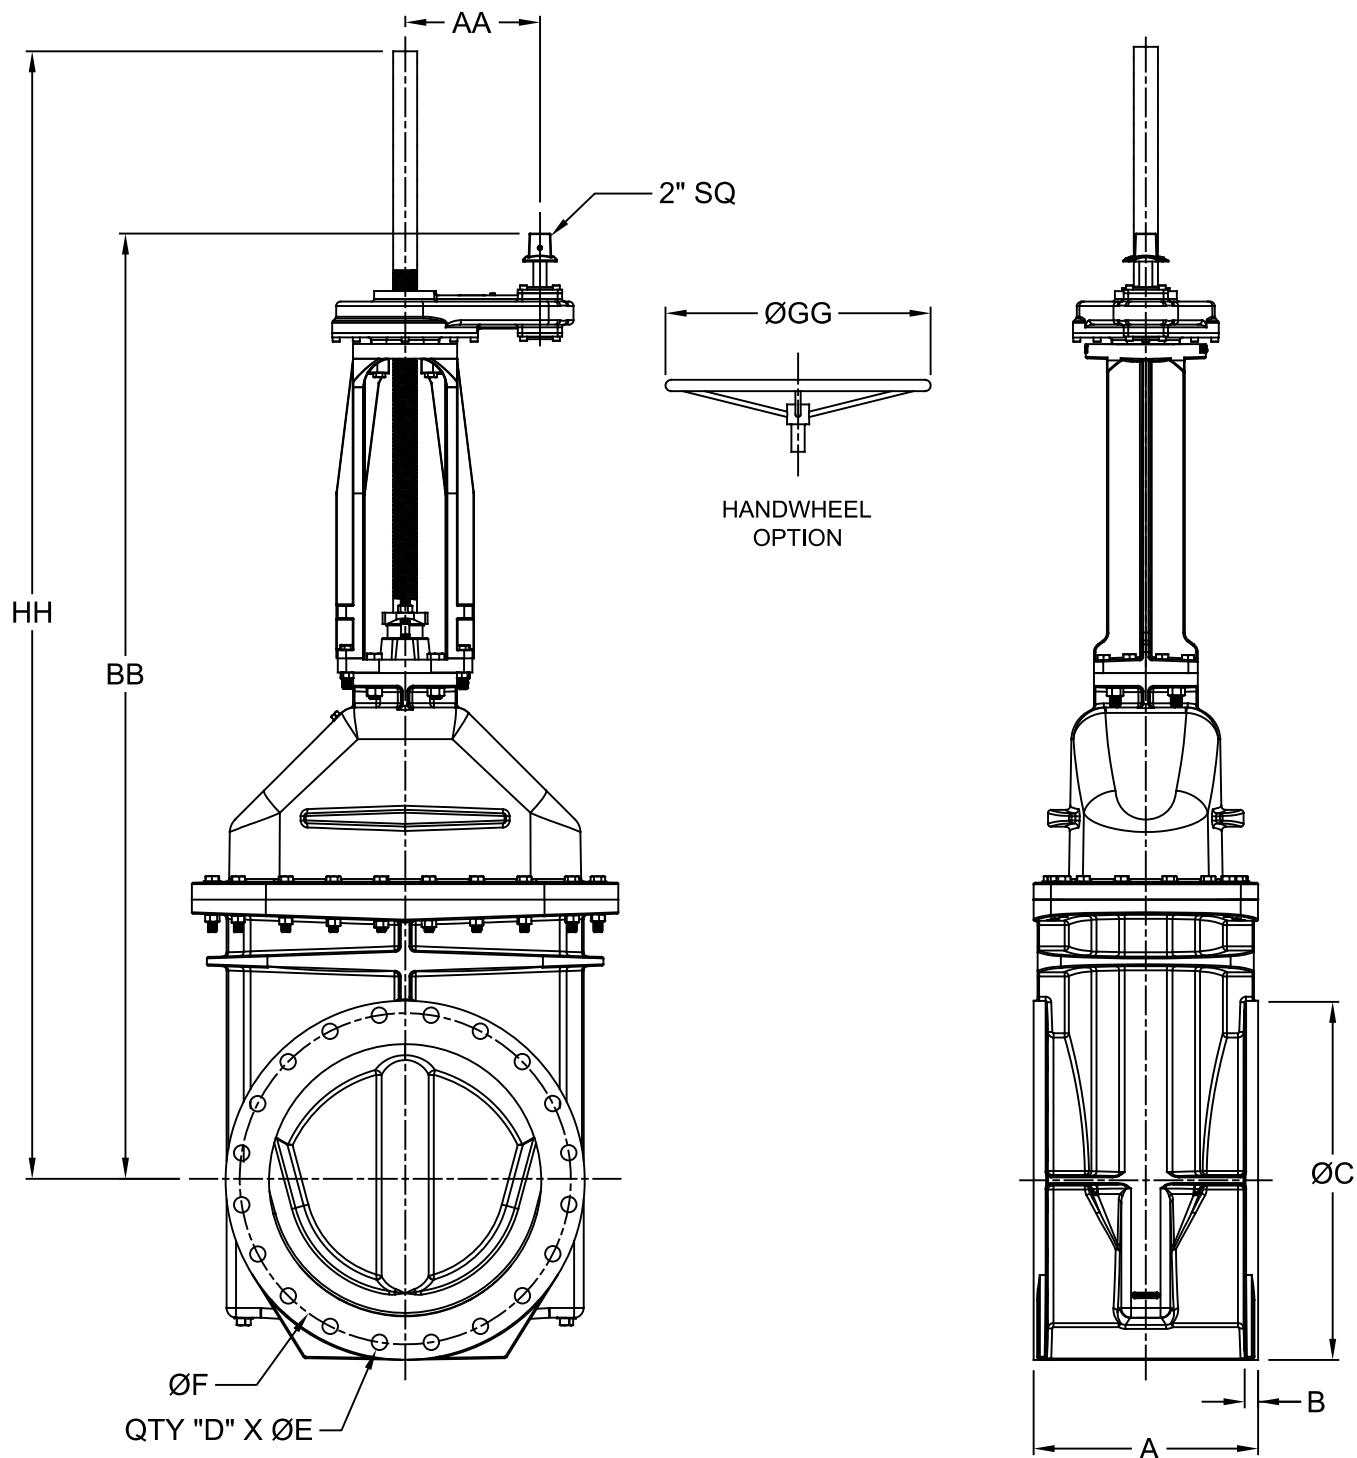

DIMENSIONS (Inches)														
SIZE	A	B	C	D	E	F	AA	BB	GG	HH OPEN	HH CLOSED	WT (lbs)	ACT. MODEL	TURNS TO OPEN
14	15.00	1.42	21.00	12	1.13	18.75	8.00	66.23	12.00	77.32	61.98	1,092	IS5 2:1	104
16	16.00	1.44	23.50	16	1.13	21.25	8.00	65.26	12.00	76.30	59.73	1,843	IS5 2:1	104
18	17.00	1.53	25.00	16	1.25	22.75	12.00	76.47	16.00	93.00	72.25	2,090	IS7 3:1	192
20	18.00	1.75	27.50	20	1.25	25.00	12.00	75.42	16.00	92.12	71.31	2,750	IS7 3:1	228
24	20.00	1.88	32.00	20	1.38	29.50	12.00	84.35	16.00	106.10	81.10	3,960	IS7 3:1	228

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 250PSI
3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

14"-24" AWWA C500 - 125# Flanged Resilient Wedge Gate Valve with Spur Gear (OS&Y)

DATE:

06/10/2026

DRAWING:

RW-DD0012-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

