
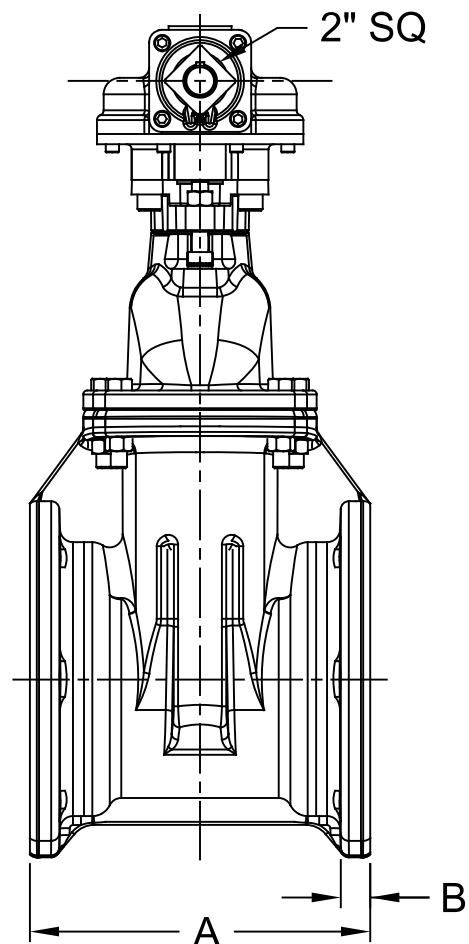


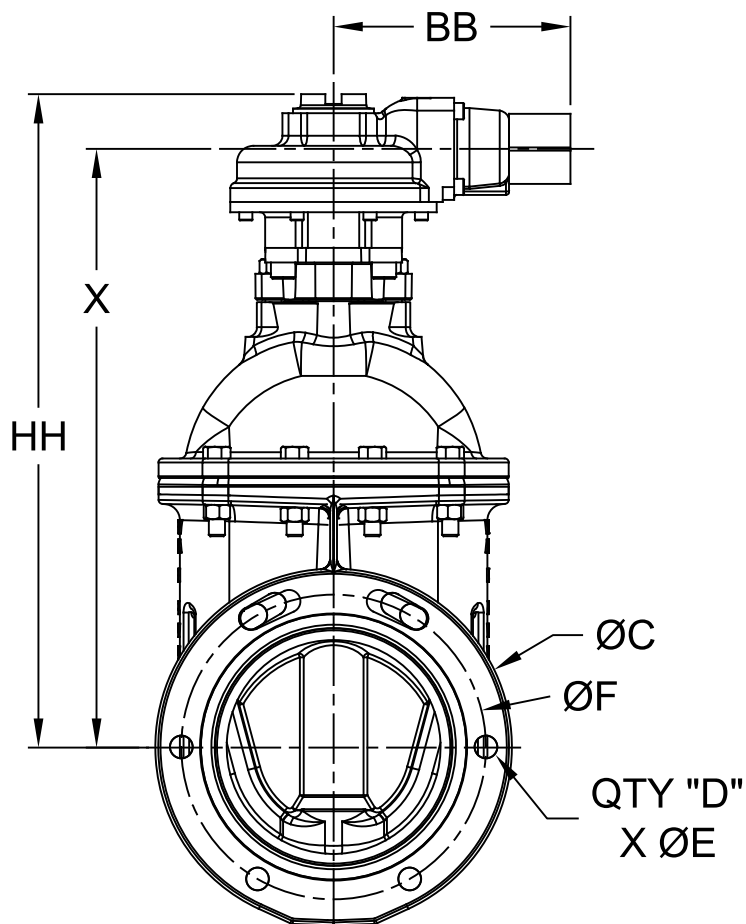

DIMENSIONS (Inches)												
SIZE	A	B	C	D	E	F	X	BB	HH	WT (lbs)	ACT. MODEL	TURNS TO OPEN
3	8.50	0.88	7.75	4	0.75	6.19	14.52	9.13	16.24	98	IB5 2:1	
4	9.50	0.55	9.13	4	0.88	7.50	16.43	9.13	18.15	110	IB5 2:1	28
6	10.50	0.57	11.37	6	0.88	9.50	19.65	9.13	21.37	148	IB5 2:1	40
8	13.13	0.62	13.75	6	0.88	11.75	23.46	9.13	25.18	203	IB5 2:1	52
10	15.50	0.65	15.75	8	0.88	14.00	27.58	9.13	29.30	284	IB5 2:1	62
12	16.00	0.65	18.00	8	0.88	16.25	30.84	9.13	32.56	323	IB5 2:1	76

NOTE:

1. ENDS CONFORM TO ANSI 21.11/AWWA C111
2. COLD WORKING PRESSURE - 250PSI
3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

3"-12" AWWA C515 - Mechanical Joint
Resilient Wedge Gate Valve (NRS) w/Bevel Gear

DATE:

06/15/2026

DRAWING:

RW-DD0021-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

