

# KEN-FLEX RESILIENT HINGE CHECK VALVES



- AWWA C508
- 3"-36"
- NSF/ANSI 61/372 CERTIFIED

## MARKETS



WATER/  
WASTEWATER



INDUSTRIAL




AGRICULTURE

## SPECIFICATIONS

|                       |                                                                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Size Range            | 3"-36"                                                                                                                                              |
| Materials             | Ductile iron body, EPDM or NBR flapper, 316SS hardware, EPDM or NBR O-rings                                                                         |
| Pressure Rating       | 250psi                                                                                                                                              |
| Temperature Range     | 0°F-250°F                                                                                                                                           |
| Body Style            | FLG                                                                                                                                                 |
| Standards             | AWWA C508, NSF/ANSI 61/372 certified                                                                                                                |
| Install Orientation   | Horizontal or vertical (flow up)                                                                                                                    |
| Featured Applications | Backflow prevention in treatment plants, pump stations, lift stations, irrigation                                                                   |
| Water Service         | Potable water, raw water, industrial wastewater, industrial water, primary effluent, secondary effluent, raw sewage, screened sewage, slurries/grit |
| Optional Accessories  | Position indicator, backflow actuator                                                                                                               |



# FEATURES AND BENEFITS

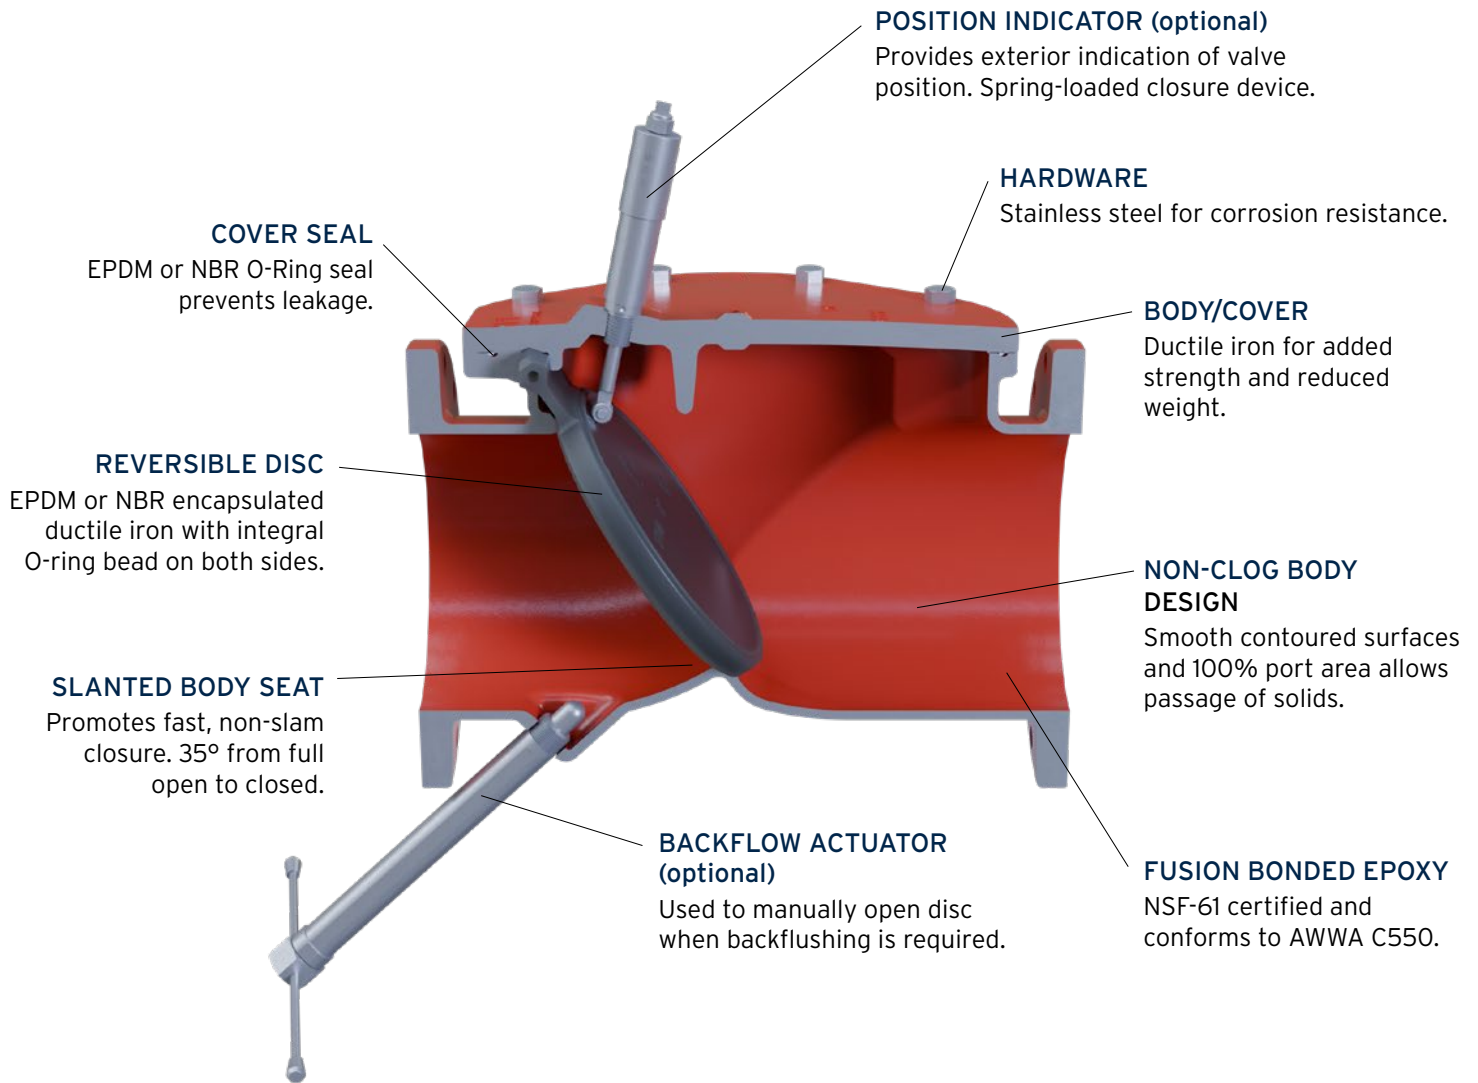

This document is provided for general informational purposes only and is not intended to define or represent the scope of supply, configuration, or origin of any product. Images, drawings, diagrams, photographs, and specifications may depict optional features or representative designs and are subject to change without notice. Nothing contained herein shall be deemed to create or extend any warranty, express or implied. All products are sold subject exclusively to McWane Plant & Industrial's standard Terms and Conditions of Sale.



MPI - MCWANE PLANT & INDUSTRIAL  
1201 Vanderbilt Road, Birmingham, AL 35234  
866.924.8674 • [mcwanepi.com](http://mcwanepi.com) • [sales@mcwanepi.com](mailto:sales@mcwanepi.com)