


HANDWHEEL OPTION

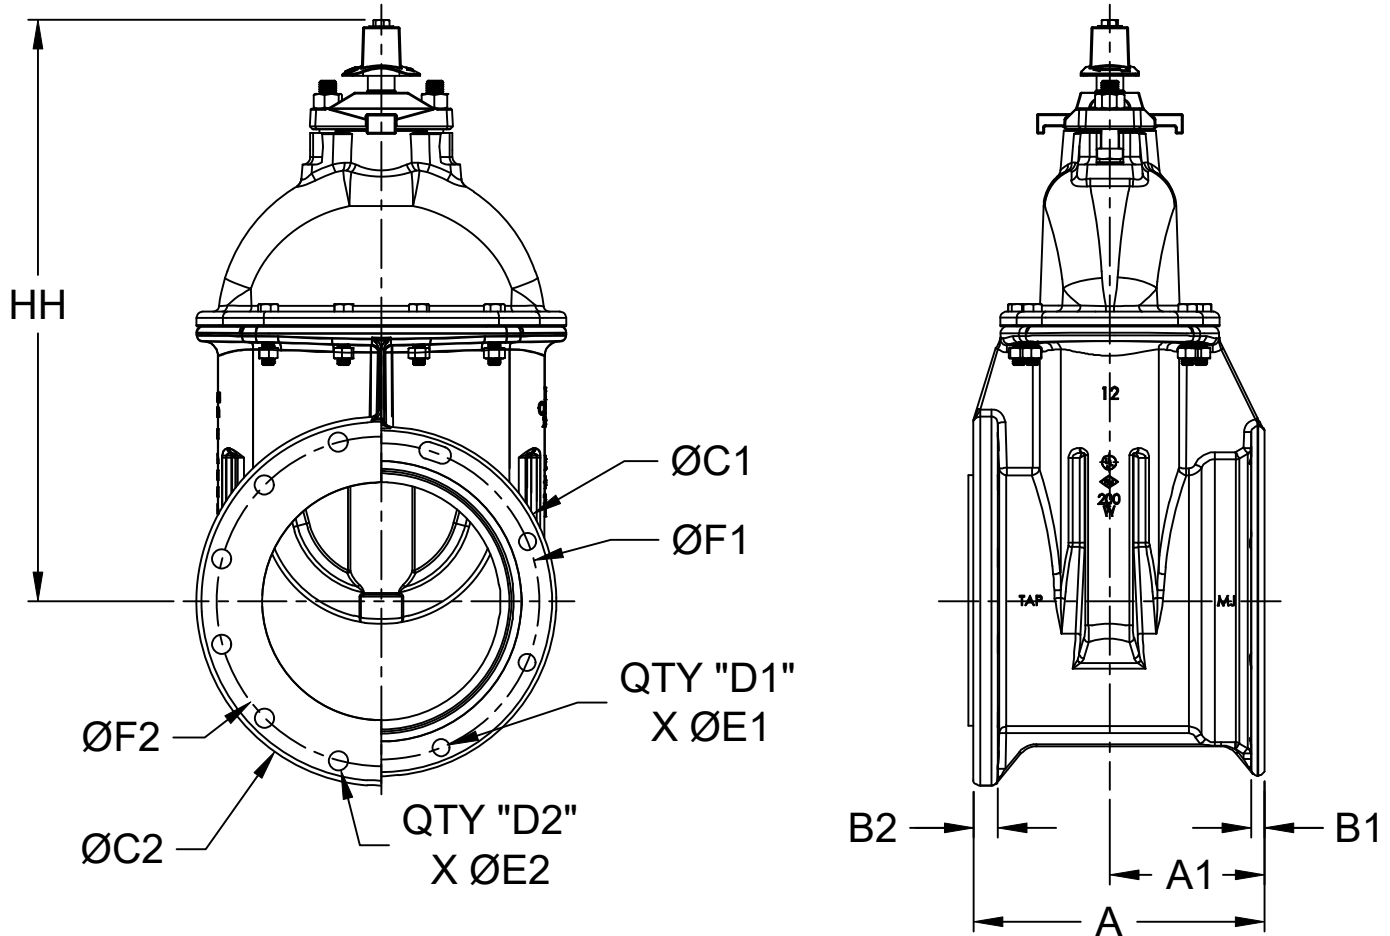

DIMENSIONS (Inches)

SIZE	A	A1	B1	B2	C1	C2	D1	E1	D2	E2	F1	F2	GG	HH	WT (lbs)	TURNS TO OPEN
3	8.25	4.25	0.88	0.75	7.75	7.50	4	0.75	4	0.75	6.19	6.00	10.00	12.38	60	10
4	9.25	4.75	0.55	0.94	9.13	9.00	4	0.88	8	0.75	7.50	7.50	10.00	14.75	92	13
6	10.50	5.25	0.57	1.00	11.38	11.00	6	0.88	8	0.88	9.50	9.50	12.00	19.00	144	19
8	12.31	5.75	0.62	1.13	13.75	13.50	6	0.88	8	0.88	11.75	11.75	14.00	22.50	224	25
10	14.25	7.75	0.65	1.19	15.75	16.00	8	0.88	12	1.00	14.00	14.25	18.00	26.50	392	31
12	15.00	8.00	0.65	1.25	18.00	19.00	8	0.88	12	1.00	16.25	17.00	18.00	30.00	527	37
14	17.00	8.50	0.91	1.38	20.25	21.00	10	0.88	12	1.13	18.75	18.75	26.00	38.40	650	52
16	16.56	8.56	0.84	1.44	22.50	23.50	12	0.88	16	1.13	21.00	21.25	26.00	37.33	720	52

NOTE:

1. MJ END CONFORMS TO ANSI 21.11/AWWA C111
2. TAP END CONFORMS TO MSS SP-60
3. COLD WORKING PRESSURE - 250PSI
4. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

3"-16" AWWA C515 - MJ x Tap Resilient Wedge Gate Valve (NRS)

DATE:

08/06/2026

DRAWING:

RW-DD0007-C



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

